


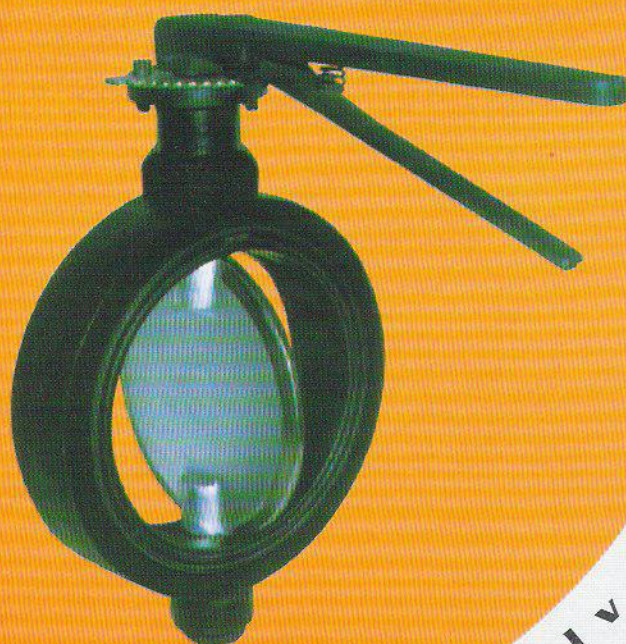

Butterfly Valve

Features:

Replaceable Sleeve.

Bubble tight shut off.

No gasket required.

Quick fitting and dismantling.

Versatility: On / Off and Throttling.

Cost: 40 to 60 % of Iron Gate Valve.


Pressure Drop: 3 times better than Globe Valve And 75% of equivalent Gate Valve.

Design	:BS 5155 / MSS- SP-67/API 609 / AWWAC-504
End Connection	:Suitable to mount between two standard pipe flanges.
Test Pressure	:Hydrostatic Shell - 15 Kg. / Seat - 10 Kg.
A	:BS 5155 / API 609

MATERIAL OF CONSTRUCTION :-

Part Name	Material			
Body	CAST IRON	WCB	CF8	CF8M
Disc	CAST IRON	WCB	CF8	CF8M
Seat	Nitrile / Neoprene / EPDM			
Spindle	AISI 410	AISI 410	AISI 304	AISI 316
Pin	AISI 410	AISI 410	AISI 304	AISI 316
Handle	C.S.			

DIMENSIONS :-

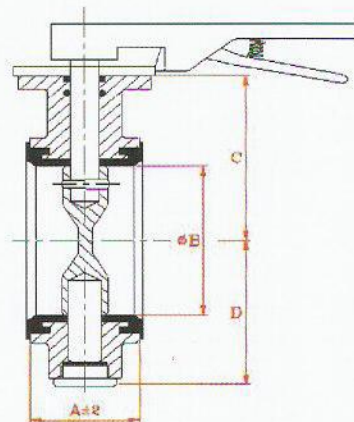

Size	50mm	65mm	80mm	100mm	125mm	150mm	200mm	250mm	300mm
A	43	46	46	52	56	56	60	68	78
B	50	65	80	100	125	150	200	250	300
C	105	115	135	150	165	185	225	255	290
D	70	80	100	115	135	155	185	215	260

Above 150 mm Gear / Actuator mounting available
Dimension, When Installed

VALCO ENGINEERING CORPORATION

202, CHHEDA BHAVAN, SURAT STREET, MUMBAI - 400 009, INDIA

Tel.: 2374 3751 / 52 Telefax : 91-22-2375 9514

Email : malgi@vsnl.com - sales@valcoexports.com · Visit : www.valcoexports.com