




LINED ECCENTRIC REDUCER

Schematic Representation Only

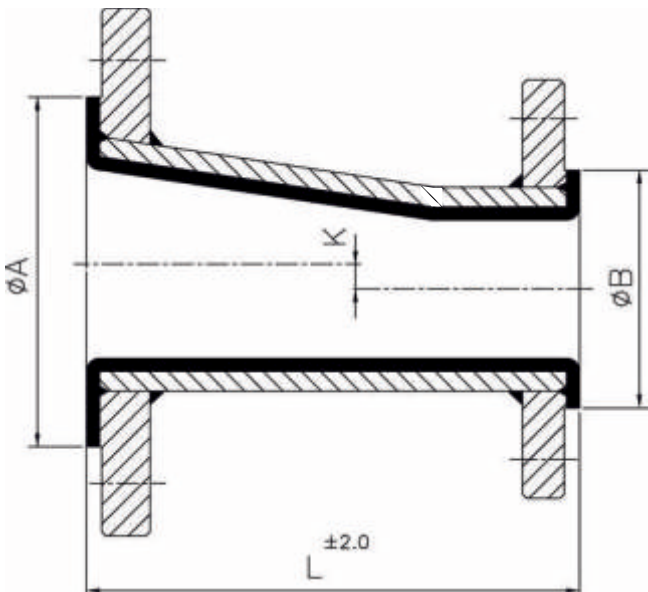

Housing Material Options :

- ASTM A234 GR. WPB
- Cast Steel ASTM A216 Gr.WCB

Lining Material Options :

- PTFE - ASTM D 4895
- FEP - ASTM D 2116
- PFA - ASTM D 3307
- PVDF - ASTM D 3322
- PP - ASTM D 4101
- HDPE

Dimensional Data :

Major Size	Minor Size (mm)	L (mm)	K (mm)	R.F (mm)	
				ØA	ØB
DN25-1"	DN15	114	-	51	35
DN40-1 ½"	DN25	114	-	73	51
DN50-2"	DN25	127	-	92	51
	DN40				73
DN80-3"	DN25	152	-	127	51
	DN40		19		73
	DN50		13		92

Dimensional Data :

Major Size (mm)	Minor Size (mm)	L (mm)	K (mm)	R.F (mm)	
				ØA	ØB
DN100-4"	DN25	178	-	157	51
	DN40		-		73
	DN50		25		92
	DN80		13		127
DN150-6"	DN50	229	-	216	92
	DN80		38		127
	DN100		25		157
DN200-8"	DN100	279	51	270	157
	DN150		25		216
DN250-10"	DN150	305	-	324	216
	DN200		-		270

Design Specifications :

- Flange : As per ANSI B16.5 / B 16.42
- Face to Face : As per ANSI B 16.5 #150
- Lining Thickness : 3 to 5 mm
- Other Flange Drillings like, DIN 2632 / 2633, BS 10 Table D, E or F are also available on request.

Test & Inspection Data :

Resins are confirming to the requirements of ASTM F1545-97 (2003)

- Hydraulic Test : 29 Kg/Cm2 After Lining.
- Spark Test : 15 KV D.C After Lining.

Technical Information subject to change without notice